


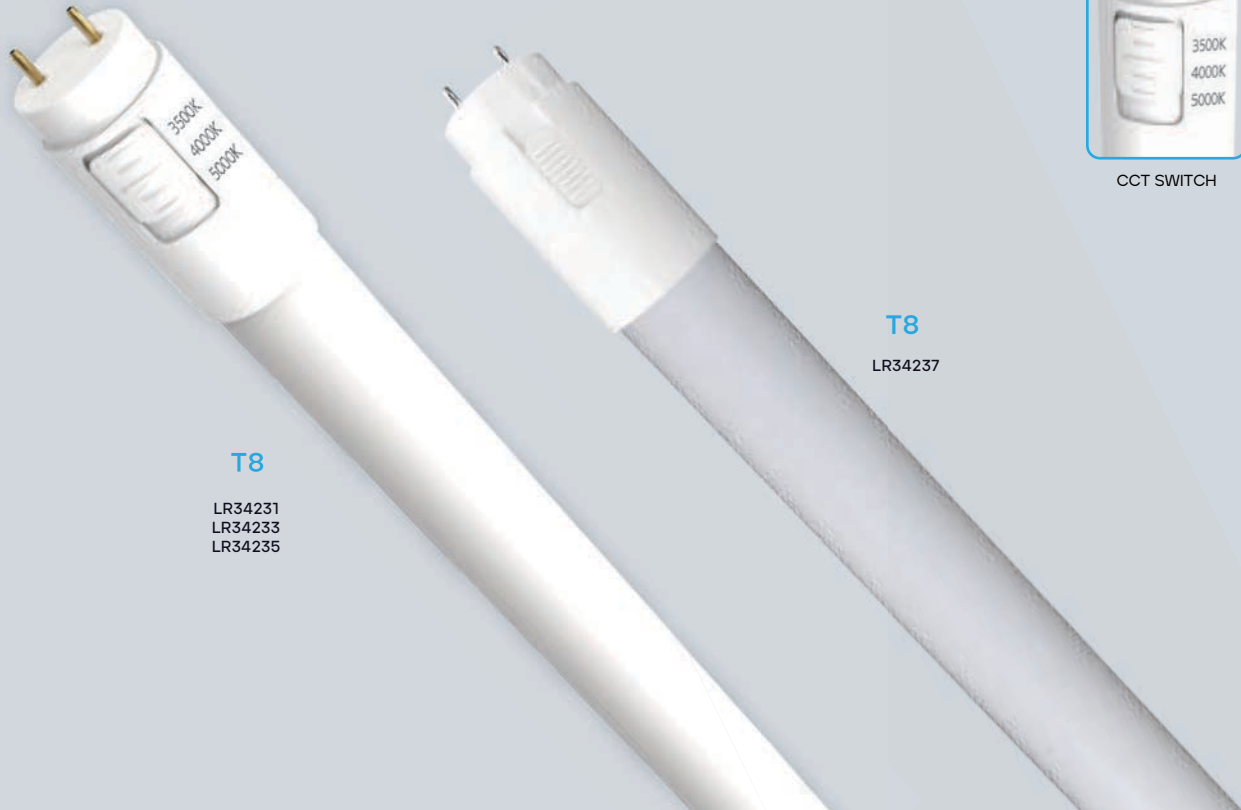


LED RETROFIT TUBE T8 UNIVERSAL - COLOR SELECTABLE 24", 36", 48"

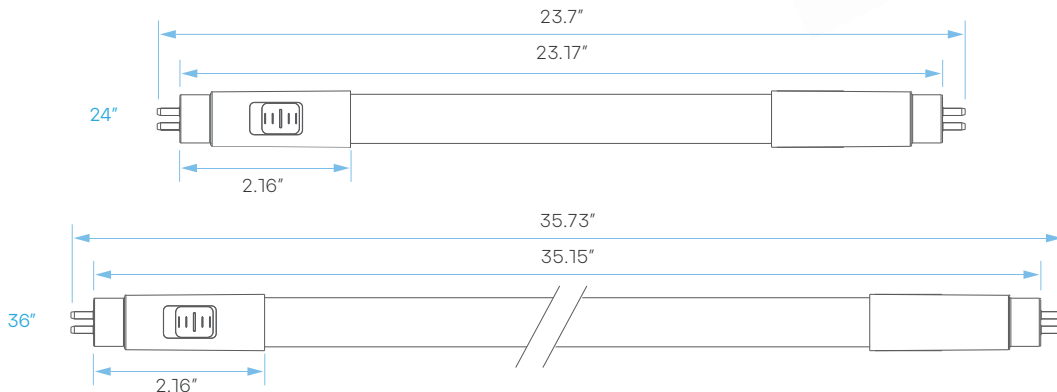

CCT SWITCH



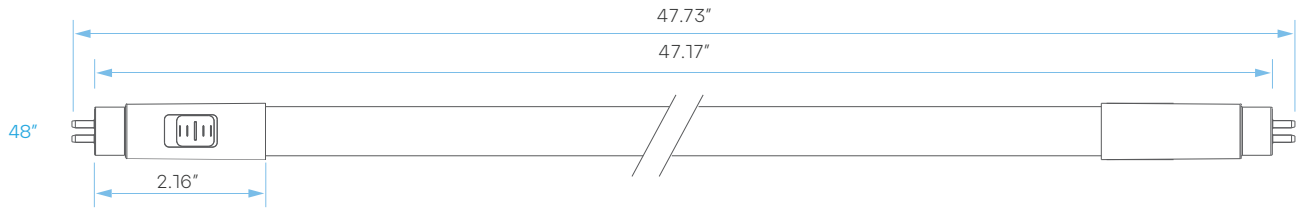

ELECTRICAL

	MODEL	DESCRIPTION	POWER (TYPE B)	POWER (TYPE A)	INPUT VOLTS	EFFICACY	LIFETIME	WATT REPLACEMENT	COST/YR
24"	LR34231	LED8T8/3CCT/24/SG/UNV3	9.5	8	120-277V OR BALLAST	120	50,000	17	\$ 0.96
36"	LR34233	LED12T8/3CCT/36/SG/UNV3	11	12	120-277V OR BALLAST	130	50,000	25	\$ 1.45
48"	LR34237	LED13T8/3CCT/48/SG/UNV3	13	15.5	120-277V OR BALLAST	126	50,000	32	\$ 1.86
	LR34235	LED18T8/3CCT/48/SG/UNV3	18	18	120-277V OR BALLAST	130	50,000	32	\$ 2.17

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	UL	DLC
LR34231	LED8T8/3CCT/24/SG/UNV3	3500K	NATURAL	1120	200°	83	YES	YES
		4000K	COOL	1150				
		5000K	BRIGHT	1150				
LR34233	LED12T8/3CCT/36/SG/UNV3	3500K	NATURAL	1440	200°	83	YES	YES
		4000K	COOL	1500				
		5000K	BRIGHT	1500				
LR34237	LED13T8/3CCT/48/SG/UNV3	3500K	NATURAL	1900	240°	83	YES	YES
		4000K	COOL	1950				
		5000K	BRIGHT	1950				
LR34235	LED18T8/3CCT/48/SG/UNV3	3500K	NATURAL	2200	200°	83	YES	YES
		4000K	COOL	2300				
		5000K	BRIGHT	2250				